

100140-25929360

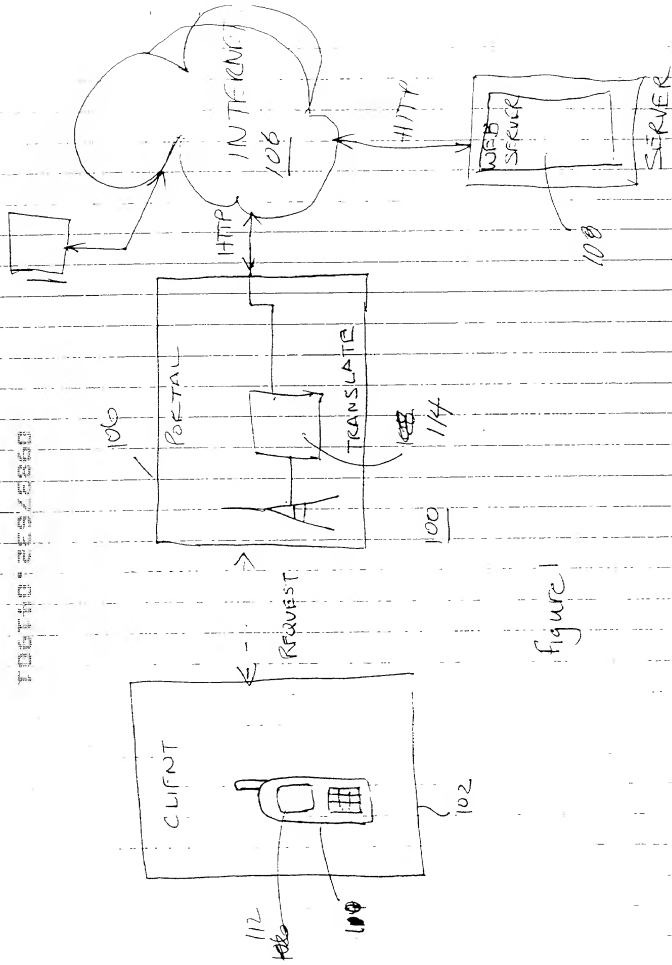


figure 1

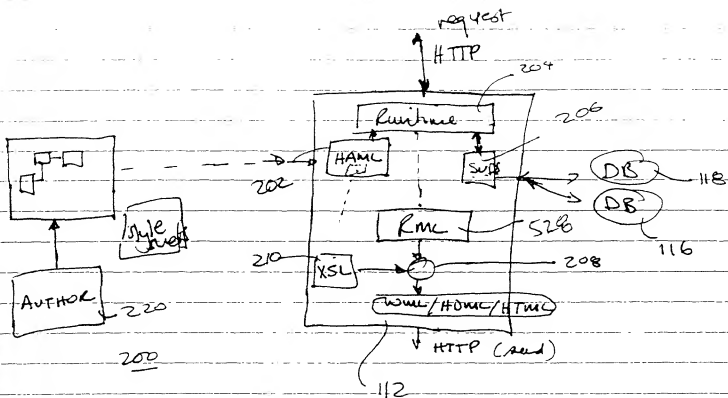


Figure 2

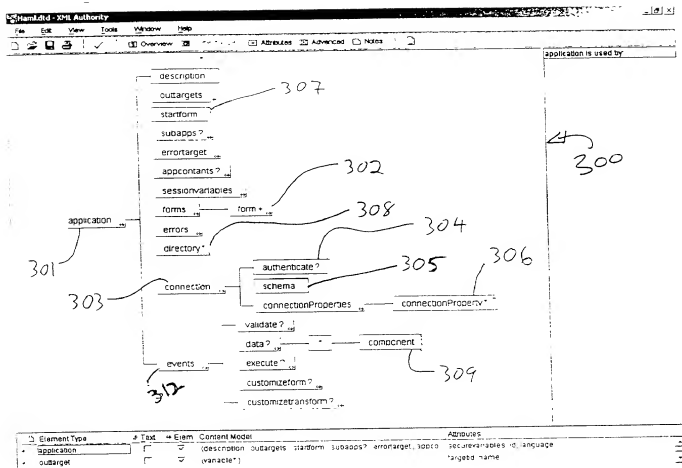


Figure 3

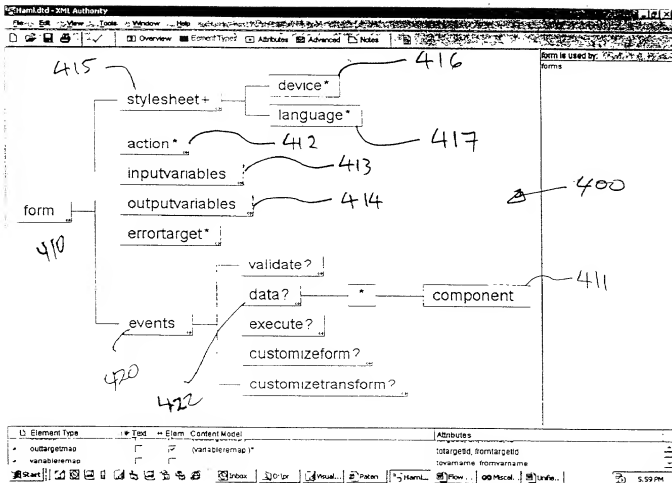


Figure 4

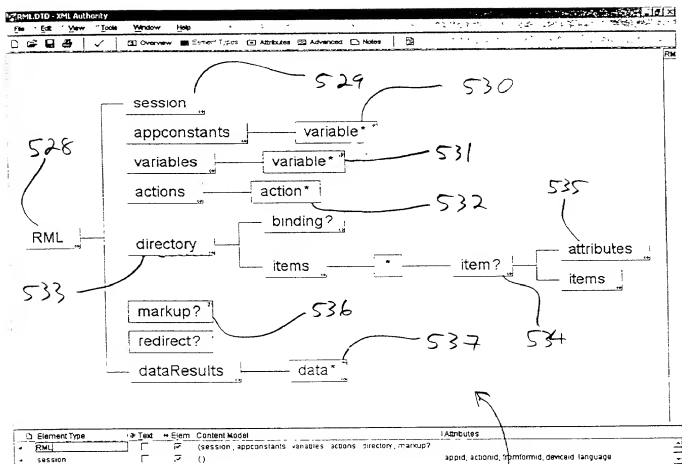


Figure 5

500

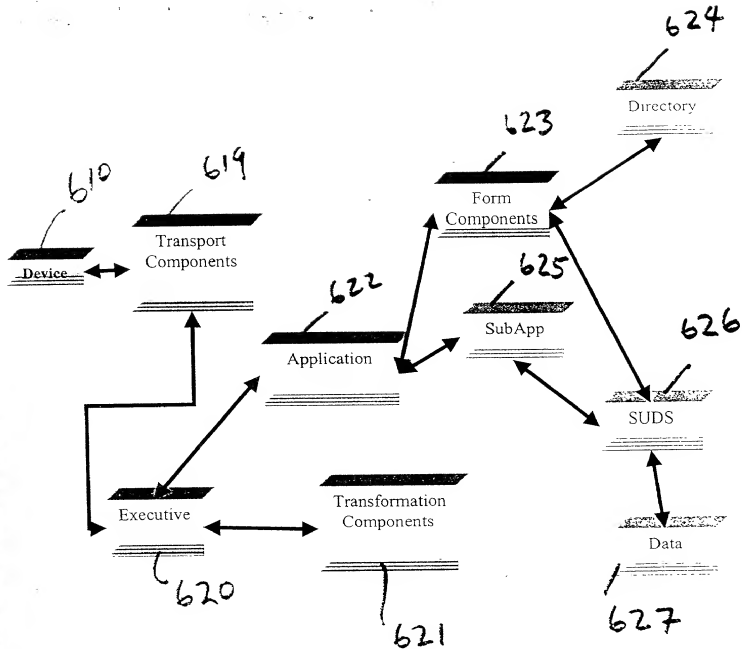


Fig 6


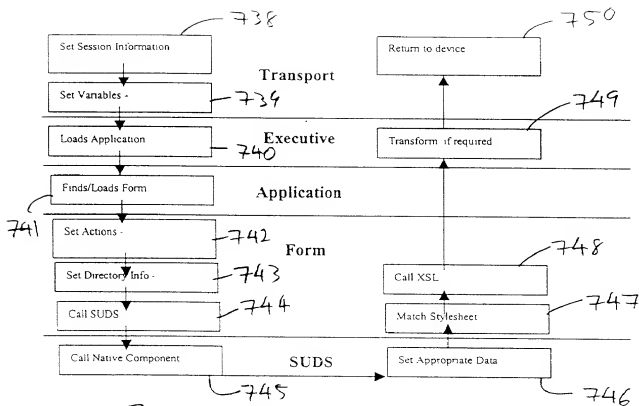


Figure 7



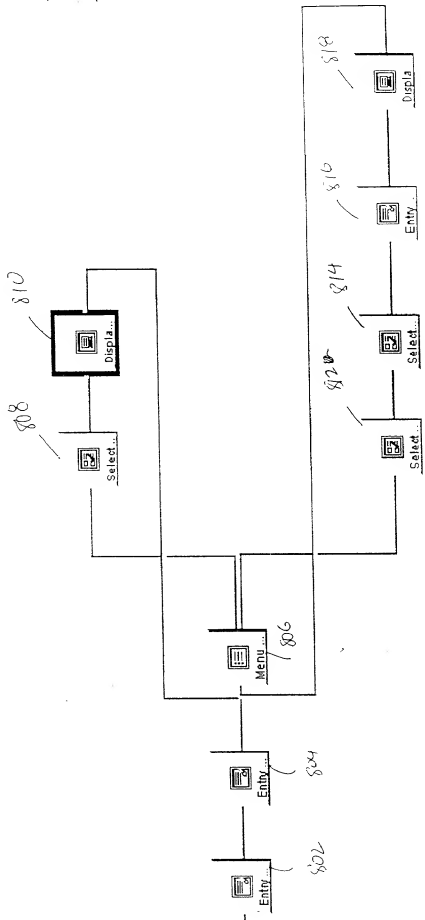

```

<?xml version="1.0" encoding="UTF-8" ?>
- <application usecookies="false" id="{F6681A6F-FB7C-4901-855C-08791DDE8DC8}"
  securevariables="false">
    <description version="1" name="MQBanking" />
    <outtargets />
    <startform totargetid="UserID" />
    <subapps />
    <errortarget totargetid="UserID" />
- <properties>
  <variable default="209.23.23.23" name="ServerIP" />
</properties>
- <sessionvariables>
  <variable name="Session" />
</sessionvariables>
- <forms>
  - <form targetid="UserID" includeheaders="false">
    <stylesheet contenttype="WML11" url="http://www.mobileq.com" />
    <action totargetid="Password" name="OK" />
    <inputvariables />
    - <outputvariables>
      <variable name="UserID" />
    </outputvariables>
    <events />
  </form>
  - <form targetid="Password" includeheaders="false">
    <stylesheet contenttype="WML11" url="http://www.mobileq.com" />
    <action totargetid="Main" name="OK" />
    - <inputvariables>
      <variable name="UserID" />
    </inputvariables>
    - <outputvariables>
      <variable name="Session" />
    </outputvariables>
    <events />
  </form>
  - <form targetid="Main" includeheaders="false">
    <stylesheet contenttype="WML11" url="http://www.mobileq.com" />
    <action totargetid="Account" name="Account Balance" />
    <action totargetid="Bill Payment" name="Bill Payment" />
    <action totargetid="Transfer" name="Account Transfer" />
    <inputvariables />
    <outputvariables />
    <events />
  </form>
  - <form targetid="Account" includeheaders="false">
    <stylesheet contenttype="WML11" url="http://www.mobileq.com" />
    <action totargetid="Details" name="OK" />
    <inputvariables />
    - <outputvariables>
      <variable name="AccountID" />
    </outputvariables>
  </form>

```

Fig 8(6)

```

    <events />
  </form>
  - <form targetid="Details" includeheaders="false">
    <stylesheet contenttype="WML11" url="http://www.mobileq.com" />
    <action totargetid="Main" name="OK" />
    <inputvariables>
      <variable name="AccountID" />
    </inputvariables>
    <outputvariables />
    <events />
  </form>
  - <form targetid="Bill Payment" includeheaders="false">
    <stylesheet contenttype="WML11" url="http://www.mobileq.com" />
    <action totargetid="Bill" name="OK" />
    <inputvariables />
    <outputvariables>
      <variable name="AccountID" />
    </outputvariables>
    <events />
  </form>
  - <form targetid="Bill" includeheaders="false">
    <stylesheet contenttype="WML11" url="http://www.mobileq.com" />
    <action totargetid="Amount" name="OK" />
    <inputvariables>
      <variable name="AccountID" />
    </inputvariables>
    <outputvariables>
      <variable name="BillID" />
      <variable name="AccountID" />
    </outputvariables>
    <events />
  </form>
  - <form targetid="Amount" includeheaders="false">
    <stylesheet contenttype="WML11" url="http://www.mobileq.com" />
    <action totargetid="Confirm" name="OK" />
    <inputvariables>
      <variable name="BillID" />
      <variable name="AccountID" />
    </inputvariables>
    <outputvariables>
      <variable name="AccountID" />
      <variable name="BillID" />
      <variable name="Amount" />
    </outputvariables>
    <events />
  </form>
  - <form targetid="Confirm" includeheaders="false">
    <stylesheet contenttype="WML11" url="http://www.mobileq.com" />
    <action totargetid="Main" name="Cancel" />
    <inputvariables>
      <variable name="AccountID" />
      <variable name="BillID" />

```

Fig 8(c)

```

        <variable name="Amount" />
    </inputvariables>
    <outputvariables>
        <variable name="AccountID" />
        <variable name="BillID" />
        <variable name="Amount" />
    </outputvariables>
    <events />
</form>
</forms>
<errors />
<events />
</application>

```

Fig 8(d)

```

</dataresults>
<data name="source1">
  <RECORDS>
    <RECORD>
      <Blair PK="1">172-32-1176</Blair>
      <Test1 PK="1">1</Test1>
      <Test2 PK="1">2</Test2>
      <Test3 PK="1">3</Test3>
      <LastName>White</LastName>
      <FirstName>Johnson</FirstName>
    </RECORD>
    <RECORD>
      <Blair PK="1">213-46-891</Blair>
      <Test1 PK="1">1</Test1>
      <Test2 PK="1">2</Test2>
      <Test3 PK="1">3</Test3>
      <LastName>Green</LastName>
      <FirstName>Marjorie</FirstName>
    </RECORD>
    <RECORD>
      <Blair PK="1">238-95-7766</Blair>
      <Test1 PK="1">1</Test1>
      <Test2 PK="1">2</Test2>
      <Test3 PK="1">3</Test3>
      <LastName>Carson</LastName>
      <FirstName>Cheryl</FirstName>
    </RECORD>
  </a>
  <RECORD>
    <Blair PK="1">238-95-7766</Blair>
    <Test1 PK="1">1</Test1>
    <Test2 PK="1">2</Test2>
    <Test3 PK="1">3</Test3>
    <LastName>Carson</LastName>
    <FirstName>Cheryl</FirstName>
  </RECORD>
</a>
</a>
<b>
  <RECORD>
    <Blair PK="1">238-95-7766</Blair>
    <Test1 PK="1">1</Test1>
    <Test2 PK="1">2</Test2>
    <Test3 PK="1">3</Test3>
    <LastName>Carson</LastName>
    <FirstName>Cheryl</FirstName>
  </RECORD>
</b>
</a>
</RECORDS>

```

Fig. 9(a)

```

</data>
<data name="source2">
  <RECORDS>
    <RECORD>
      <Blair PK="1">aaaaaa</Blair>
      <Test1 PK="1">1</Test1>
      <Test2 PK="1">2</Test2>
      <Test3 PK="1">3</Test3>
      <LastName>White</LastName>
      <FirstName>Johnson</FirstName>
    </RECORD>
    <RECORD>
      <Blair PK="1">bbbbbbb</Blair>
      <Test1 PK="1">1</Test1>
      <Test2 PK="1">2</Test2>
      <Test3 PK="1">3</Test3>
      <LastName>Green</LastName>
      <FirstName>Marjorie</FirstName>
    </RECORD>
    <RECORD>
      <Blair PK="1">cccccc</Blair>
      <Test1 PK="1">1</Test1>
      <Test2 PK="1">2</Test2>
      <Test3 PK="1">3</Test3>
      <LastName>Carson</LastName>
      <FirstName>Cheryl</FirstName>
    </RECORD>
  </a>
  <RECORD>
    <Blair PK="1">ddddddd</Blair>
    <Test1 PK="1">1</Test1>
    <Test2 PK="1">2</Test2>
    <Test3 PK="1">3</Test3>
    <LastName>Carson</LastName>
    <FirstName>Cheryl</FirstName>
  </RECORD>
</a>
  <a>
    <b>
      <RECORD>
        <Blair PK="1">eeeeeeee</Blair>
        <Test1 PK="1">1</Test1>
        <Test2 PK="1">2</Test2>
        <Test3 PK="1">3</Test3>
        <LastName>Carson</LastName>
        <FirstName>Cheryl</FirstName>
      </RECORD>
    </b>
  </a>
</RECORDS>
</data>
</dataresults>

```

Fig. 9(b)

```
<actions>
  <action formatstring="" actionid="OK" querystring "?
    _SQRSIGN=A&_SQAPPID={B77444A1-BD9E-4248-A664-
    6C483F8B4540}&_ACTIONID=OK&_SQFORMID={8D7B4336-6341-
    4D2C-B2D8-49FE88D1B13A}&EmployeeID=$EmployeeID" />
</actions>
<dictionary>
  <variable />
  <variable />
</dictionary>
</rml>
```

Fig 9(c)

```

<xsl:stylesheet xmlns:xsl="http://www.w3.org/TR/WD-xsl"
  <xsl:template match="/">
    <wml>
      <head>
        <meta name="FormType" content="SQSelectForm" />
        <meta name="ListMethod" content="numeric" />
      </head>
      <card>
        <xsl:attribute name="title">qwe</xsl:attribute>
        <p>
          <select>
            <xsl:attribute name="title">qwe</xsl:attribute>
            <xsl:attribute name="name">asd</xsl:attribute>
            <xsl:for-each select="/rml/dataresults/data
              [&name='source2']/RECORD">
              <option>
                <xsl:attribute name="value">
                  <xsl:value-of select="Blair" />
                  z1z
                  <xsl:value-of select="Test1" />
                  z1z
                  <xsl:value-of select="Test2" />
                  z1z
                  <xsl:value-of select="Test3" />
                </xsl:attribute>
                <xsl:attribute name="title">
                  <xsl:value-of select="LastName" />
                  '
                  <xsl:value-of select="FirstName" />
                  '
                  <xsl:value-of select="/rml/data
                    [&name='source1']/RECORDS/RECORD/Blair" />
                </xsl:attribute>
                blah blah blah
              </option>
            </xsl:for-each>
          </select>
        </p>
        <xsl:for-each select="/rml/actions//action">
          <do>
            <xsl:attribute name="type">accept</xsl:attribute>
            <xsl:attribute name="label">
              <xsl:value-of select="@actionid" />
            </xsl:attribute>
            <go>
              <xsl:attribute name="href">
                <xsl:value-of select="@querystring" />
              </xsl:attribute>
            </go>
          </do>
        </xsl:for-each>
      </card>

```

Fig 10(a)

</wml>  
</xsl:template>  
</xsl:stylesheet>

Fig 10(b).



```

</wml>
- <head>
  <meta name="FormType" content="SQSelectForm" />
  <meta name="ListMethod" content="numeric" />
</head>
- <card title="Select Account">
  - <p>
    - <select title="Select Account" name="HoldingsAccountID">
      <option value="1" title="Acct 10314">Acct 10314</option>
      <option value="2" title="Acct 11345">Acct 11345</option>
    </select>
    <br />
  </p>
  - <do type="accept" label="OK">
    <go href="?_SQRSIGN=A&_SQAPPID={8D360BDF-E570-45E9-BEC1-4E5DD949C5C0}&_ACTIONID=OK&_SQFORMID={BCC091A1-63D4-11D3-9E34-0090273EFC3B}&HoldingsAccountID=${HoldingsAccountID}&UserID=246531&Session=1}" />
  </do>
</card>
</wml>

```

Fig. 11

# Error

A very bad error happened

OK

Figure 12